




KIRNCROFT
SECURITY DOORS

KIRNCROFT FIRE-RATED ANTI-VANDAL SHUTTER

SECURE AND FIRE-SAFE

FULLY SEALED DOOR AND FRAME

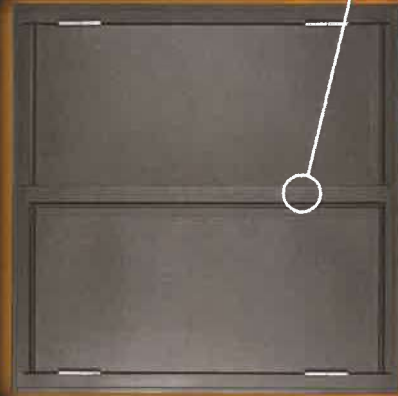

FULLY GALVANISED CONSTRUCTION

55MM DOOR DEPTH

90MM FRAME DEPTH



KIRNCROFT CORESTRENGTH[®]
8MM STRENGTHENING BARS

ROCKWOOL FACADEROCK 140KG/M³
FIRE RATED INSULATION

OVERSIZED
ANTI-JEMMY FLANGE

FITTED WITH:
DOUBLE GLAZED LOW-E UPVC
FRAME TILT-AND-TURN GLAZING UNIT

FITTED WITH:
SINGLE OR DOUBLE GLAZED
SLIDING ALUMINIUM GLAZING UNIT

STAINLESS STEEL
FINGER-OPERATED LATCHES



INTEGRITY (E) 120 MINUTES
INSULATION (I2) 30 MINUTES
RADIATION (W) 120 MINUTES

INTEGRITY (E) 60 MINUTES
INSULATION (I2) 30 MINUTES
RADIATION (W) 60 MINUTES



TESTED AT WARRINGTONFIRE TO BS EN 1634-1:2014 + A1:2018